



**OU1 Design Change and Modification Sheet:  
Change/Modification # 36**

*This form is used to document changes and modification to the approved plans.*

*This form will be kept with the official Quality Control Site Plan.*

Date Initiated: 6/27/12

Date Executed: 6/29/12

Property ID: \_\_\_\_\_ Operable Unit 1 \_\_\_\_\_

**Design Change / Modification Description:**

Sheet C6, Driveway to the boat ramps. Eliminate remainder portion of circular planter area and modify the curvature of the drive to the east of the circular planter to eliminate abrupt curve in drive.

*Reference attached drawings.*

Changes marked on Quality Control Plans? Yes ☒ No ☐

**Signatures:**

Approved:

USACE or EPA: B. B. Date: 6-29-12


City of Libby: Jim Hamman Date: 6/29/2012

Acknowledged:

CQC: [Signature] Date: 6/29/12

TQA: [Signature] Date: 6/29/12



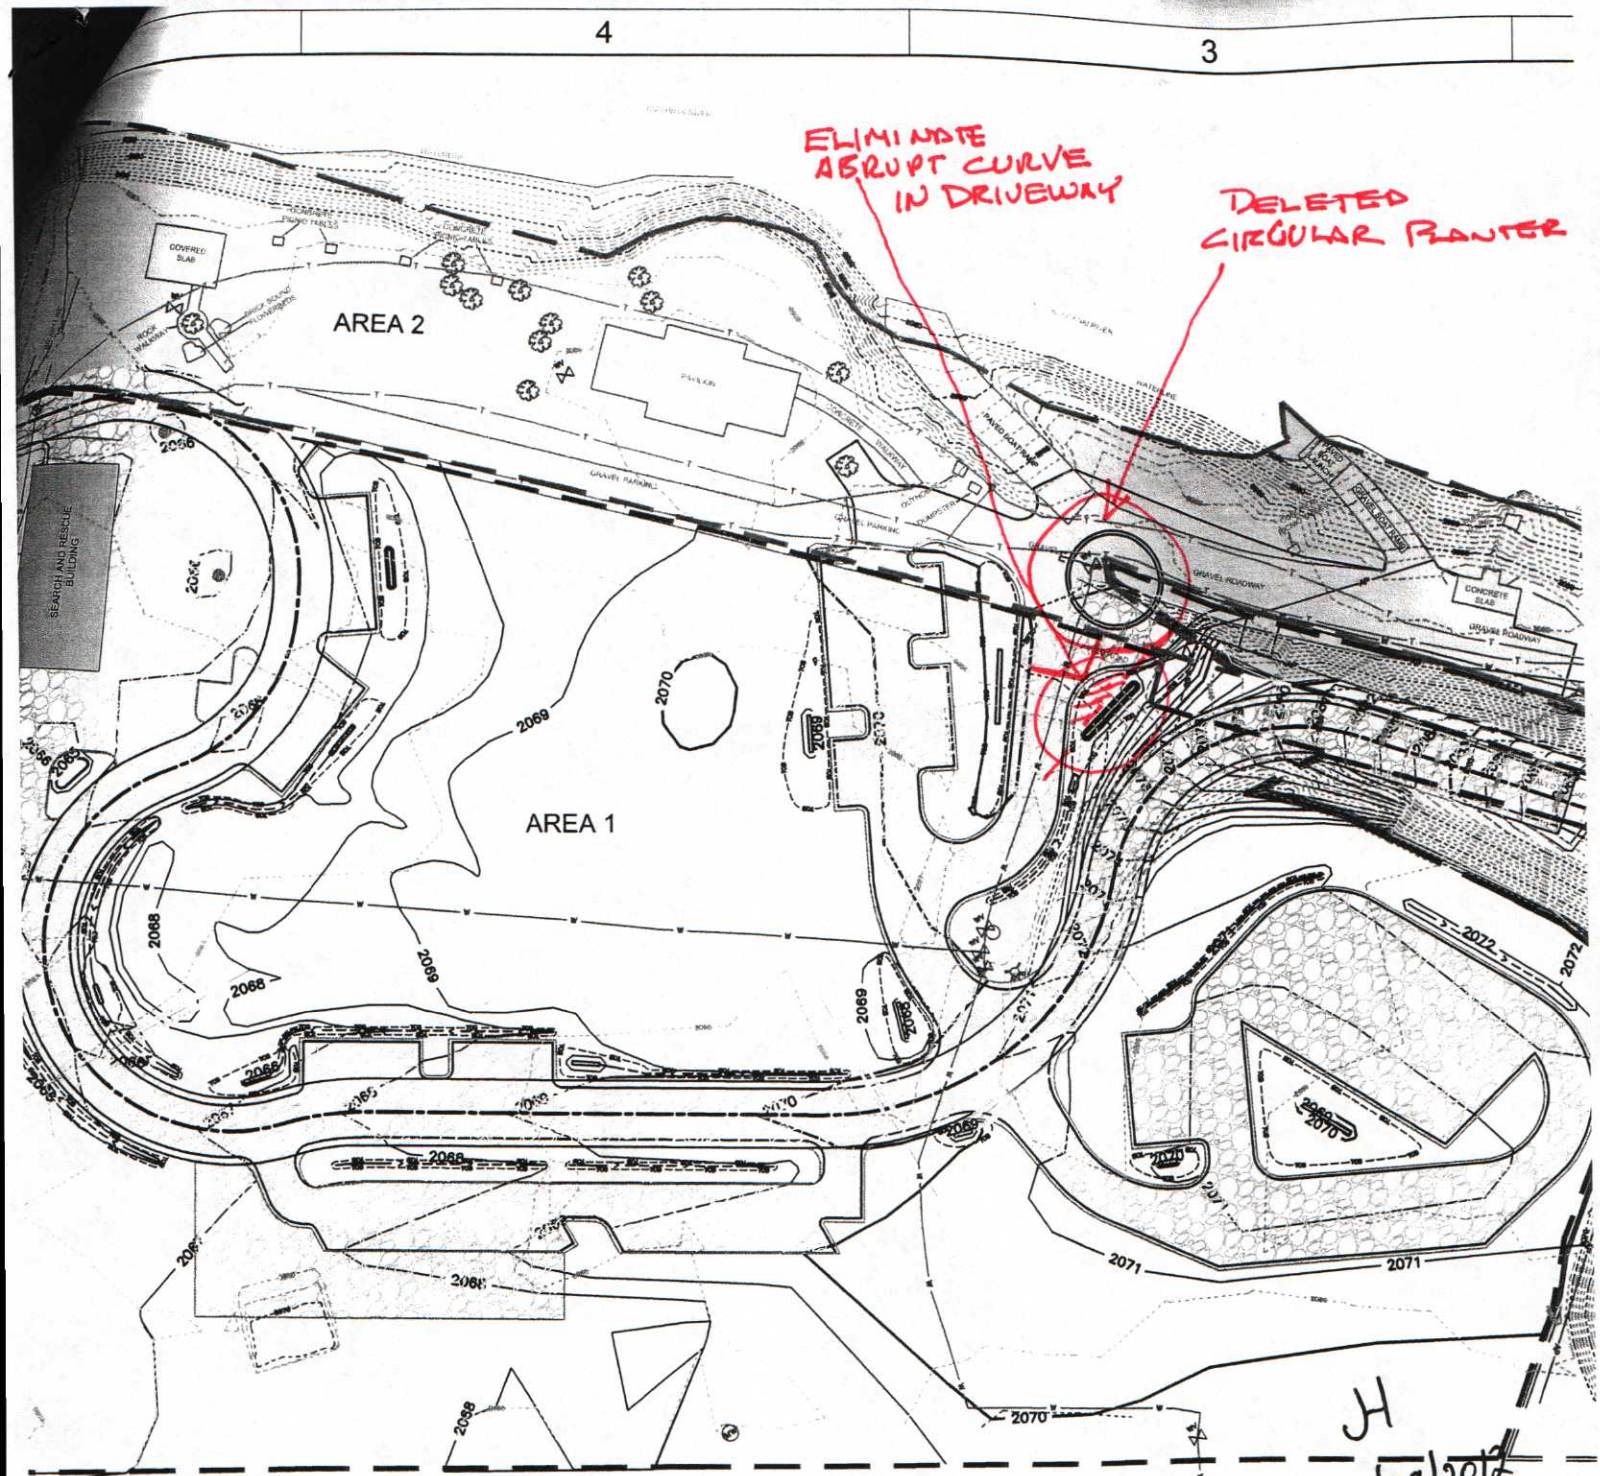

SHALL CONSIST OF MINERAL SOIL SUBSTANTIALLY FREE OF ORGANIC MATERIAL, LOAM, WOOD, OTHER OBJECTIONABLE MATERIALS WHICH MAY BE COMPRESSIBLE OR WHICH CANNOT BE IMPACTED.

SHALL NOT CONTAIN ANY STONES LARGER THAN 2 INCHES IN THE LARGEST DIMENSION AND THE GRADATION SHOWN ON TABLE 1 BELOW.

SHALL HAVE A LIQUID LIMIT LESS THAN 35 AND A PLASTICITY INDEX LESS THAN 10.

TABLE 1. COMMON FILL GRADATION

SIEVE SIZE	PERCENT FINES PER WEIGHT
2.0 INCHES	100
NO. 4	65 TO 90
NO. 40	30 TO 70
NO. 200	20 TO 40

TABLE 2. 3" MINUS GRADATION

SIEVE SIZE	PERCENT FINES PER WEIGHT
3.0 INCHES	100
NO. 4	25 TO 60
NO. 200	2 TO 12

Q  
X  
F  
E  
I  
N  
T  
I  
T



# OU1 PARKING AREA MODIFICATION

SCALE: 1" = 20'

DATE: 6-27-12

7/27/2012  
H

